


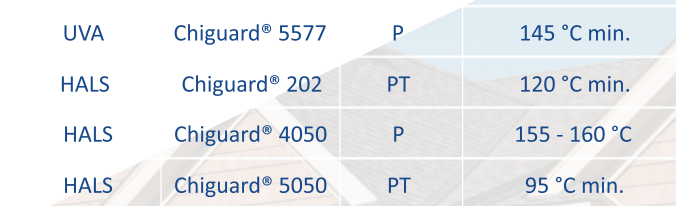
Artificial Turf

Function	Product	Form	Melting Point
HALS	Chiguard® 202	PT	120 °C min.
HALS	Chiguard® 228	P	115 - 150 °C
HALS	Chiguard® 4050	P	155 - 160 °C



Residential Siding and Roofing Membrane

Function	Product	Form	Melting Point
UVA	Chiguard® 234	P	137 °C min.
UVA	Chiguard® 5577	P	145 °C min.
HALS	Chiguard® 202	PT	120 °C min.
HALS	Chiguard® 4050	P	155 - 160 °C
HALS	Chiguard® 5050	PT	95 °C min.



Carpet and Automotive Fibers

Function	Product	Form	Melting Point
UVA	Chiguard® 1064	P	89 °C min.
HALS	Chiguard® 106	P	110 °C min.
HALS	Chiguard® 202	PT	120 °C min.
UVA Blend	Chiguard® HP-1011	PT	80 °C min.



chitec
www.chitec.com

16F, No. 51, Sec. 2, Keelung Rd.,
Taipei City 110, Taiwan
Email : sales@chitec.com
Tel : +886-2-2700-6678

Greener, safer,
and more effective

Chemistry

CHIGUARD® UV Stabilizers

for *Masterbatches*

